

High End Elektromotoren

PLETTENBERG

HP 620/40/B8 P28

Spannung: 65 V


$n_l=7912.0\text{U/min}$
 $n_s=126.7\text{U/min/V}$

$I_o=10.1\text{A}$
 $k_n=-27.36\text{U/min/A}$

$k_M=10.04\text{Ncm/A}$

Spannung [V]	Strom [A]	Drehzahl [U/min]	Pin [W]	Pout [W]	Drehmoment [Ncm]	Wirkungsgrad [%]
64.6	20.0	7696.7	1291.7	803.9	99.7	62.23
64.6	25.0	7532.8	1614.5	1182.6	149.9	73.25
64.6	30.0	7373.5	1937.3	1545.1	200.1	79.76
64.6	35.0	7218.8	2259.9	1892.0	250.3	83.72
64.6	40.0	7068.7	2582.6	2224.2	300.5	86.12
64.6	45.0	6923.3	2905.1	2542.3	350.7	87.51
64.6	50.0	6782.5	3227.6	2847.0	400.8	88.21
64.5	55.0	6646.4	3550.1	3139.2	451.0	88.43
64.5	60.0	6514.9	3872.5	3419.4	501.2	88.30
64.5	65.0	6388.0	4194.8	3688.6	551.4	87.93
64.5	70.0	6265.7	4517.1	3947.3	601.6	87.38
64.5	75.0	6148.1	4839.4	4196.3	651.8	86.71
64.5	80.0	6035.2	5161.5	4436.3	702.0	85.95
64.5	85.0	5926.8	5483.7	4668.2	752.1	85.13
64.5	90.0	5823.1	5805.7	4892.5	802.3	84.27
64.5	95.0	5724.1	6127.7	5110.1	852.5	83.39
64.5	100.0	5629.6	6449.7	5321.7	902.7	82.51

HP620_40B8P28_65V_18062015

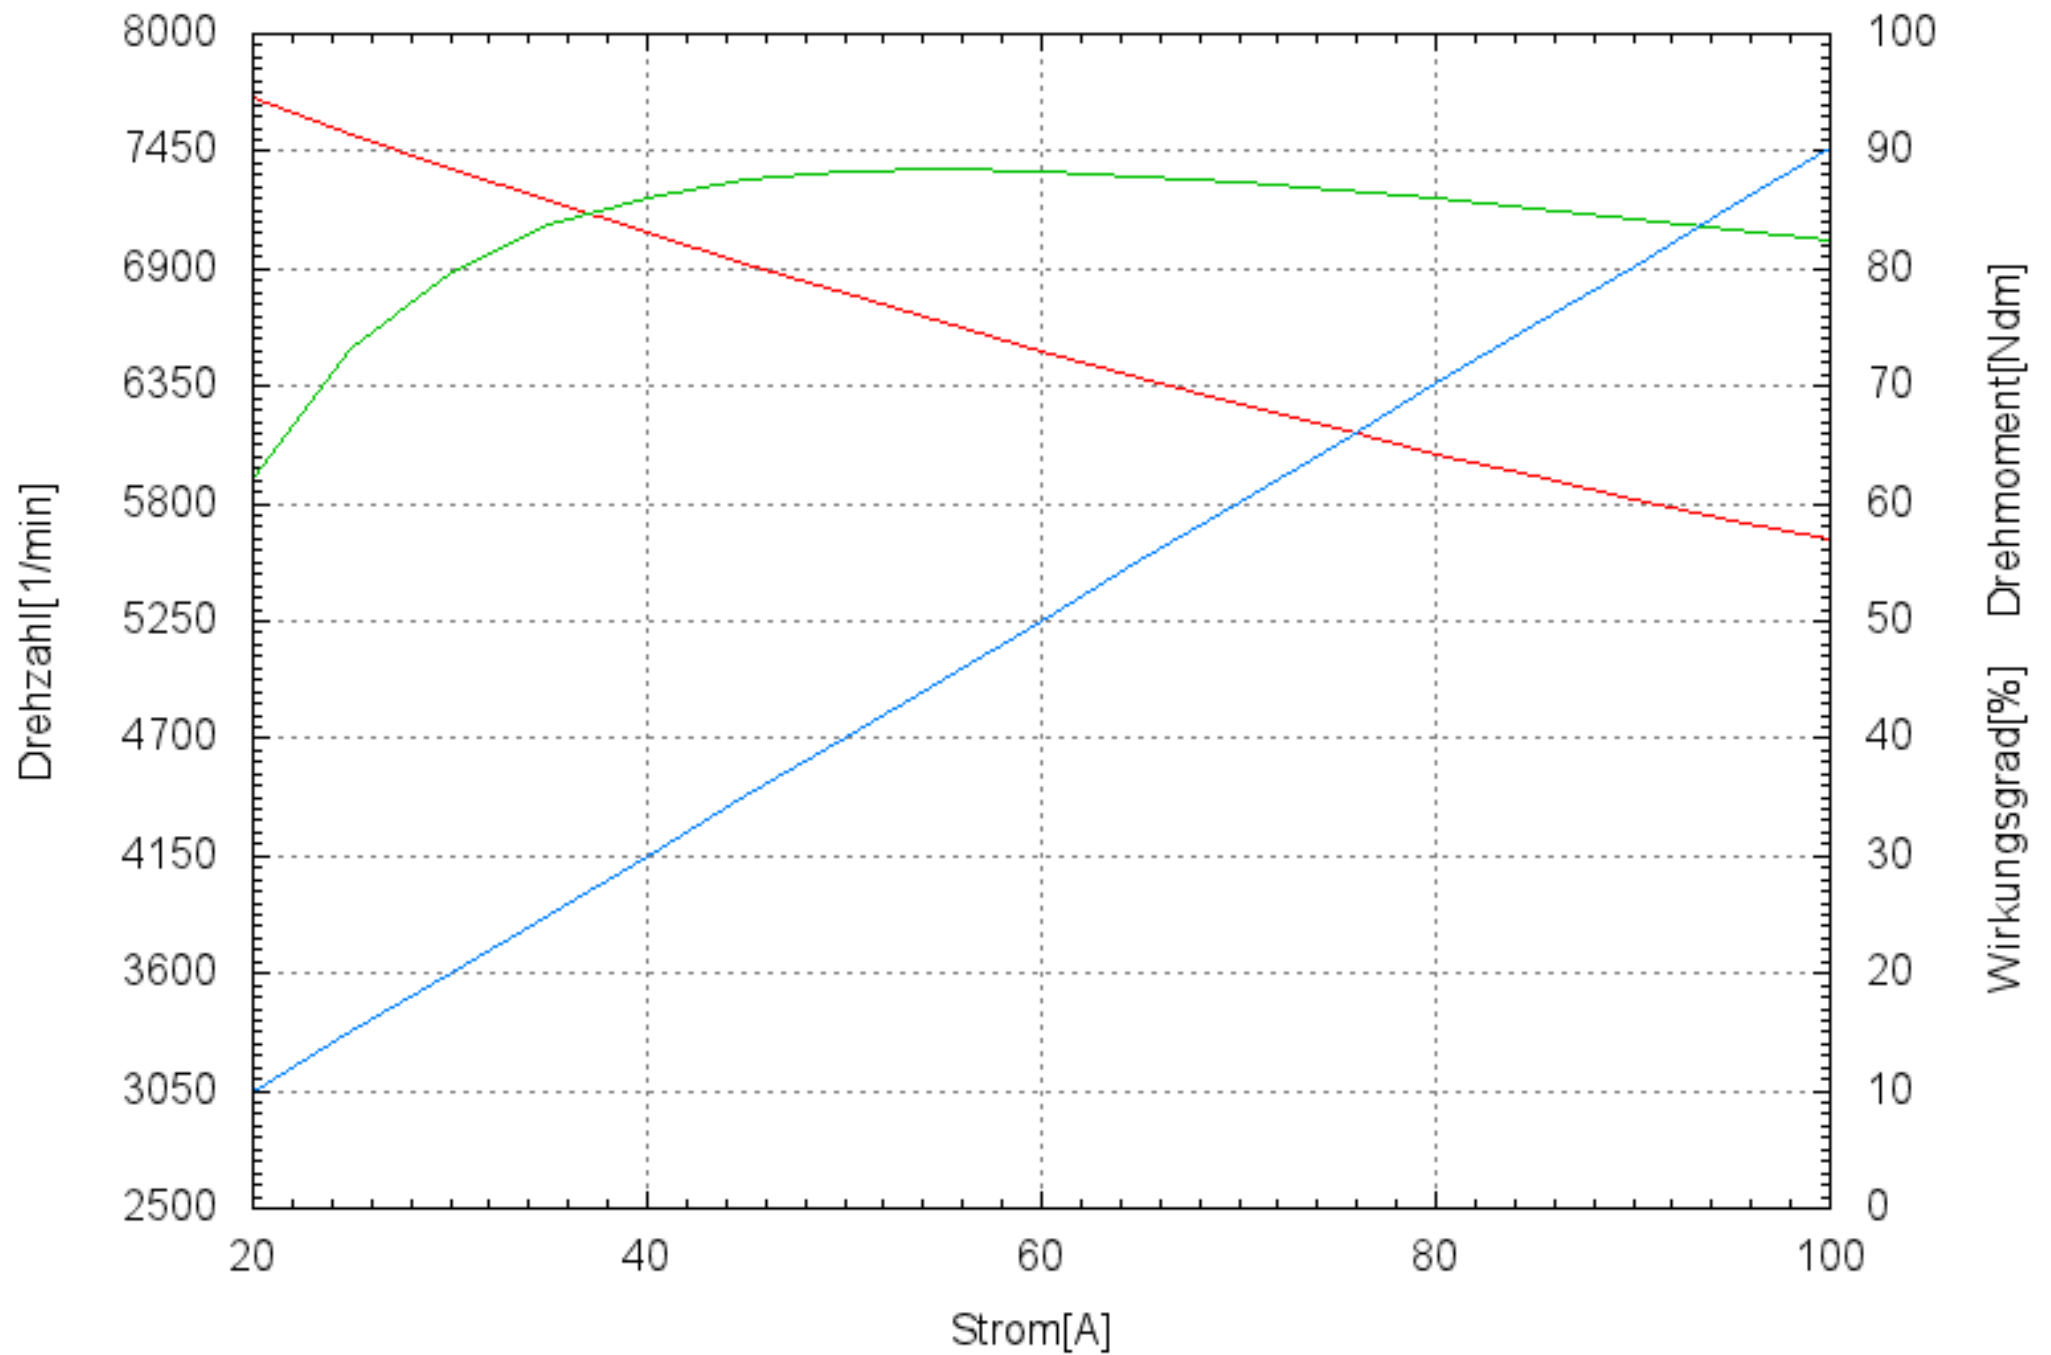

Drehzahl — Wirkungsgrad — Drehmoment